

Installation Instruction

Grille Guard 5041 / 5041-2

97-04 Dodge Dakota Pickup 2/4WD

98-2003 Dodge Durango 2/4WD

- | | |
|---|--|
| <ul style="list-style-type: none"> • 1 pc Grille Guard • 2 pc Lower Mounting Brackets • 2 pc Upper Mounting Brackets • 2 pc M10 x 1" Hex Bolts • 2 pc M10 Hex Nuts | <ul style="list-style-type: none"> • 2 pc M10 Lock Washers • 4 pc M10 Oversized Flat Washer • 4 pc M12 x 40mm Hex Bolts • 4 pc M12 Lock Nuts • 8 pc 12mm Flat Washers |
|---|--|

Instructions:

Step One: Locate the hardware kit and check the contents of with the hardware listed below.


Illustrations are for reference only, styles vary with application.

Step Two: Locate the two factory bolts that hold the main bumper bracket in place on each side of the vehicle. Remove the nuts on them one side at a time. Orient the brackets as per Fig.#1 and loosely reinstall the nuts.


Step Three: Open the hood and remove the two innermost upper bumper bolts. Orient the upper support brackets as per Fig.#2. Loosely reinstall the factory bumper bolts.

Step Four: Place the front guard up to the vehicle with the lower mounting brackets going to the outside of the side plates.

Step Five: Make final adjustments to the alignment of the guard and tighten all the bolts at this time.
(NOTE: Make sure the guard does not interfere with the opening and closing of the hood.)

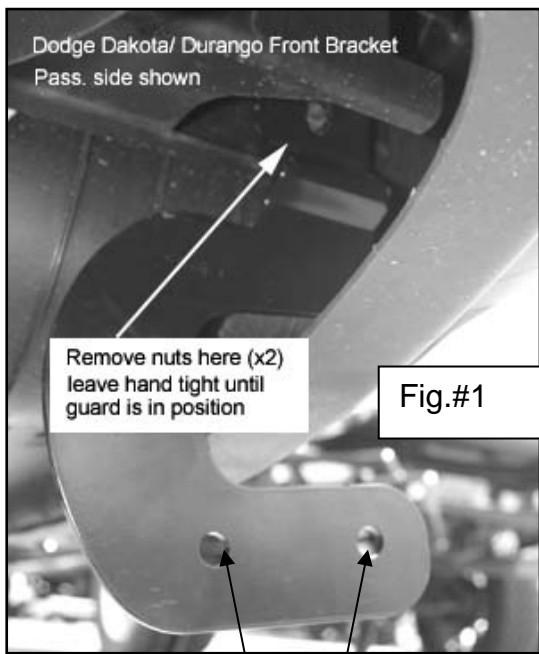

- 2pcs M12 x 40mm Hex Bolts
- 4pcs 12mm Flat Washers
- 2pcs M12 Lock Nuts

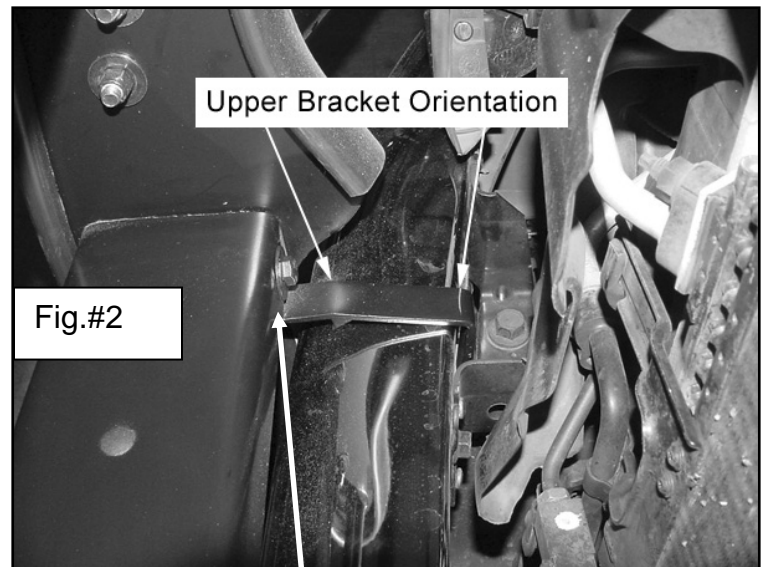

- 1pc M10 x 1" Hex Bolts
- 2pcs 10mm Oversized Flat Washer
- 1pc 10mm Lock Washer
- 1pc M10 Hex Nuts