

### Parts List

1	Roller fairlead
2	Socket cap screw, M10 x 1.5 x 30mm
4	Flat washer, M10
2	Lock washer, M10
2	Hex nut, M10

### Tools Required

Allen wrench, 8mm	Wrench, 17mm
-------------------	--------------

### Torque Specifications

	TORQUE SPECIFICATIONS	
<b>METRIC</b>	M6 bolt	3 ft.-lbs.
	M8 bolt	7 ft.-lbs.
	M10 bolt	16 ft.-lbs.
	M12 bolt	28 ft.-lbs.
<b>SAE</b>	1/4" bolt	3 ft.-lbs.
	5/16" bolt	7 ft.-lbs.
	3/8" bolt	16 ft.-lbs.
	7/16" bolt	20 ft.-lbs.
	1/2" bolt	28 ft.-lbs.


### Level of Difficulty

Easy



Scan for helpful install tips

### Product Image

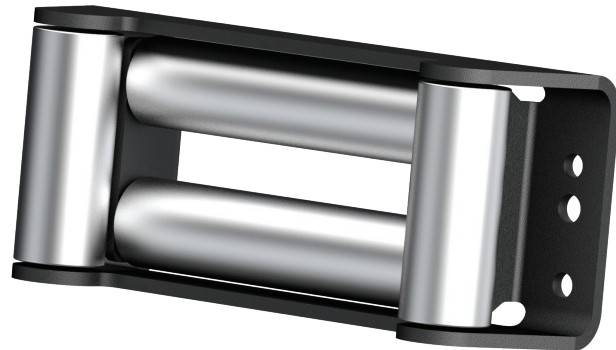

### Notes and Maintenance

Before you begin installation, read all instructions thoroughly.

Proper tools will improve the quality of installation and reduce the time required.

Refer to the table to the left when securing hardware during the installation process to help prevent damage to the product or vehicle.

### Step 1

Locate the two mounting holes on the front bumper of the vehicle.

Place the fairlead onto the front bumper and secure the fairlead to the bumper using two M10 bolts, four M10 flat washers, two M10 lock washers and two M10 nuts.

Tighten all hardware to the recommended torque specifications listed in the table above.

With the fairlead installed, periodic inspections should be performed to ensure all mounting hardware remains tight.

